



LG G Pad X 8.0 Motherboard Replacement

A bit more complex but still reasonable replacement guide for the LG G Pad X 8.0 motherboard.

Written By: Calvin Hodgson



INTRODUCTION

The motherboard replacement is more time extensive than a simple battery swap but should still be manageable for any novice. Keep track of your screws since they are tiny and easy to lose.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)

#00



PARTS:

- [LG G Pad X 8.0 Motherboard](#) (1)

Step 1 — Removing Backplate



- Power off the device before starting battery replacement.
- Remove SD card and SIM Card.
- With the opening tool, gently pry the back plate away from the main board. The corners are the easiest spots to start at.

Step 2 — Peeling Back Cover Off



- Gently pull the back cover away from the adhesive on the battery.


⚠ It may be possible to use a blow dryer on low heat but I'd advise against it unless absolutely necessary.

Step 3 — Detaching Old Battery



- Slowly and gently lift the power cable upwards.
- Unscrew the 4 screws keeping the battery in place, set aside.

Step 4 — Removing the Battery

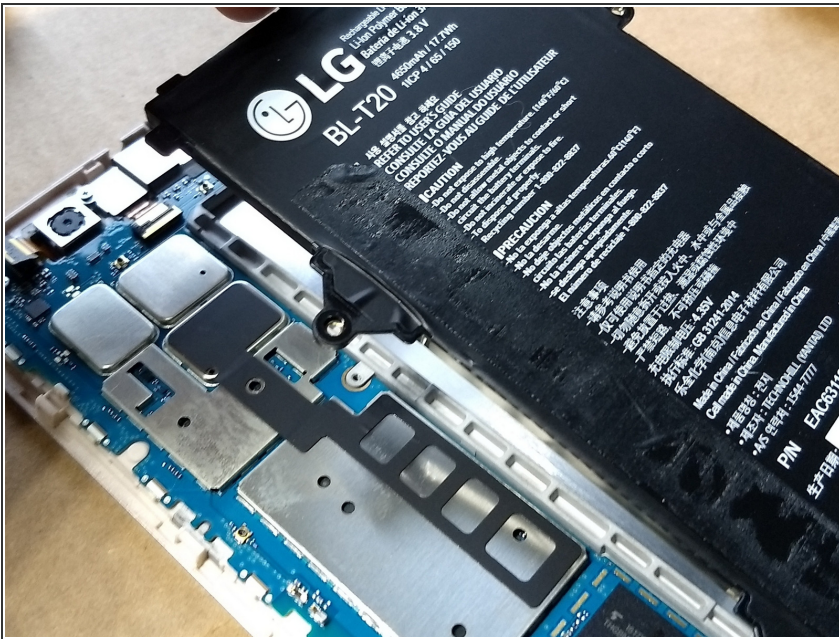

- Remove the battery by pulling up gently.

Step 5 — Disconnect Cables




- Pry the connector for the camera up.
- Pry the connector for the USB module up.
- Pry the cable connecting the metal circle.

Step 6 — Remove screws



- Unscrew the 3 screws holding the USB module down.
- Unscrew the 2 screws keeping the motherboard in place.
- Finally, the two screws for the micro USB port.


Step 7

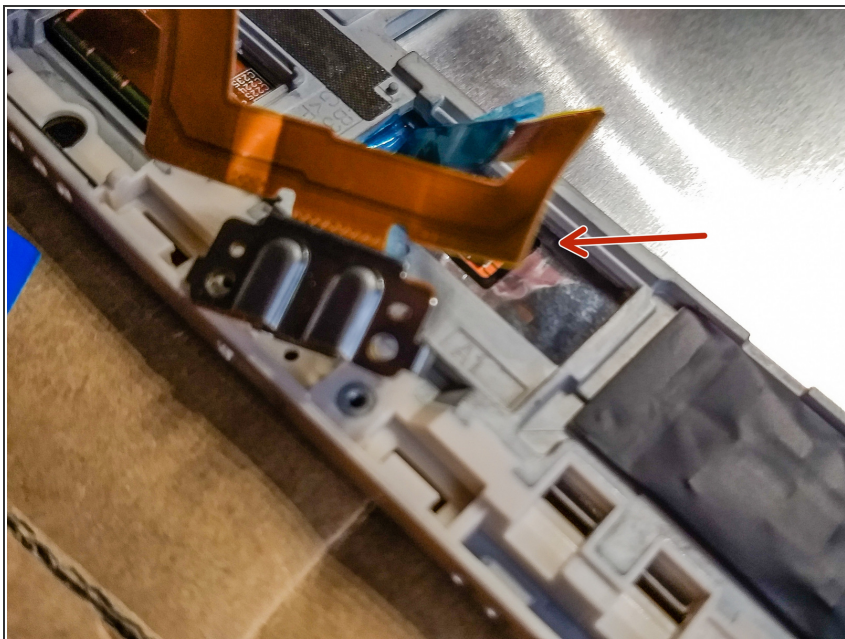

- Gently lift up the display connector.

⚠ Be careful, too much pressure can cause the digitizer/screen to crack as it is right below the metal.

Step 8 — Removing the Motherboard

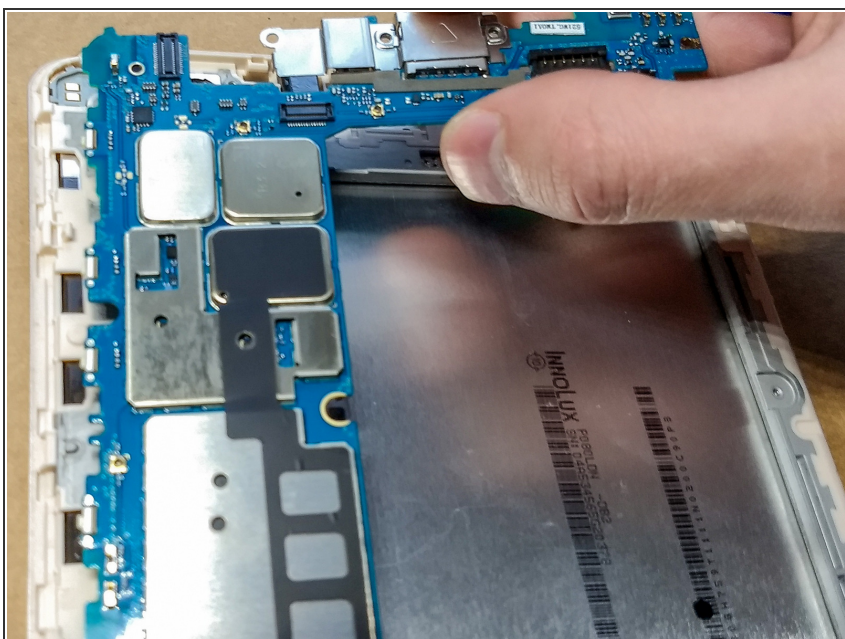

- Remove the motherboard by pulling it straight up and away from the tablet body.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-15 03:07:28 PM.